

V-BOX PASSIVE

MONO ACTIVE DIRECT BOX

INTRODUCTION


The V-BOX mark-II mono active direct box is a high performance active direct box for live concert touring and professional recording studio applications, with the ability to handle extreme transients without distortion while delivering the natural sound of your instrument.



FEATURE


- Increased dynamic range and headroom
- Retains the natural sound of the instrument
- Powered by 48V phantom, no batteries required

OVERVIWE

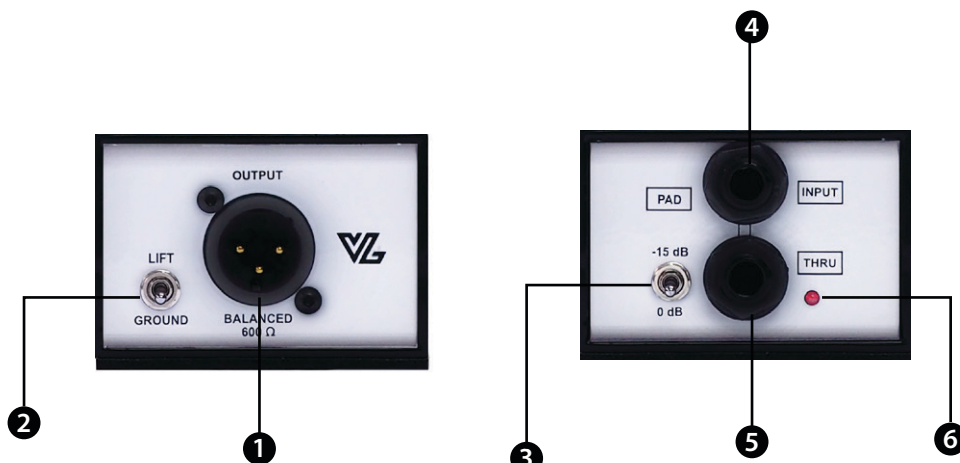

1. **Line-level outputs** Balanced input, male XLR connectors.
2. **Ground/Lift switch** Disconnects XLR pin-1 on INPUT
3. **Pad** Reduces the input sensitivity for active basses and high-output keyboards.
4. **1/4" Input** Instruments connection to the V-BOX mark-II stereo passive direct box.
5. **1/4" Thru** Instruments thru-put to an amplifier.
6. **Phantom power LED** Light to confirm phantom-power is present the working.

BLOCK DIAGRAM

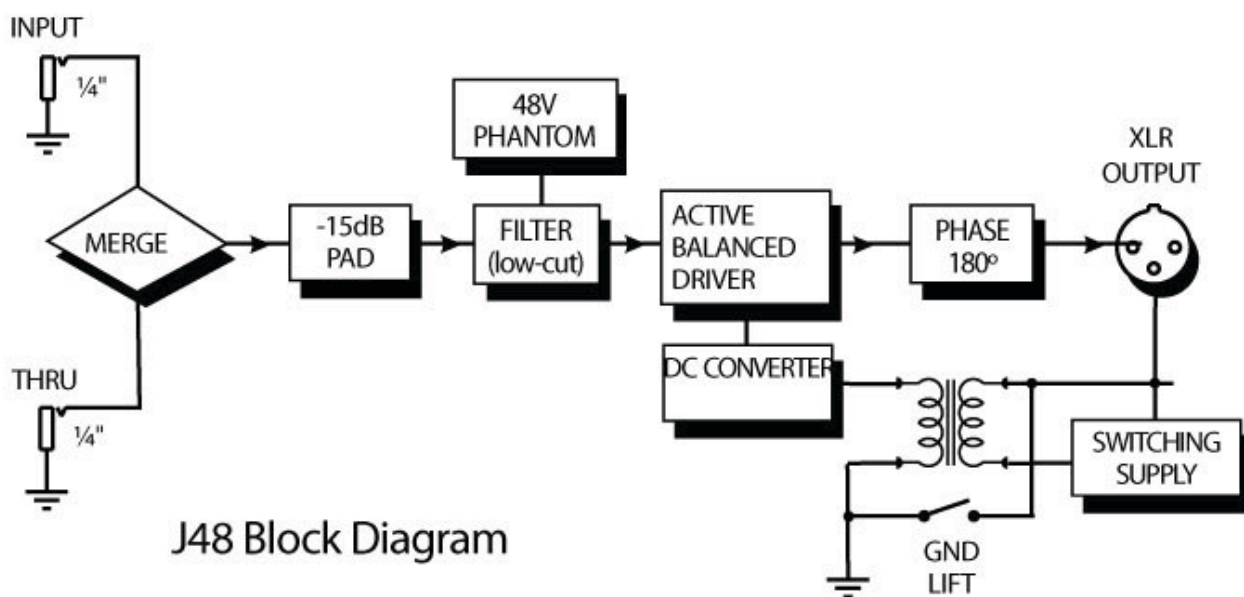

TECHNICAL SPECIFICATIONS

SPECIFICATIONS	Audio circuit type	Proprietary analog circuit with low-noise op-amp
	Number of channels	Mono
	Frequency response	20Hz - 20kHz
	Dynamic range	135dB
	Total harmonic distortion	0.0020% @ 1k, +4dBu
	Phase Deviation	-10° @ 20Hz, 2° @ 100Hz
	Input Impedance	140kΩ, Unbalanced
	Output Impedance	600Ω, Balanced
	Maximum Input	+21 dBu @20Hz - 20kHz (with Pad)

FEATURES	Ground lift	Yes
	Phantom power LED	Yes
	Input Connectors	1/4"
	Output Connectors	XLR male output

General	Conditions	For use in dry locations only
	Warranty	Life time

Size	Height	4.8 cm.
	Width	6.9 cm.
	Depth	9.7 cm.
	Weight	0.25 cm.


Shipping informations	Package Height	5.2 cm.
	Package Width	9.2 cm.
	Package Depth	12.2 cm.
	Package Weight	0.33 cm.

APPLICATIONS




Graphs Frequency Response


Stereo Direct Box Passive Total Harmonic Distortion vs Frequency

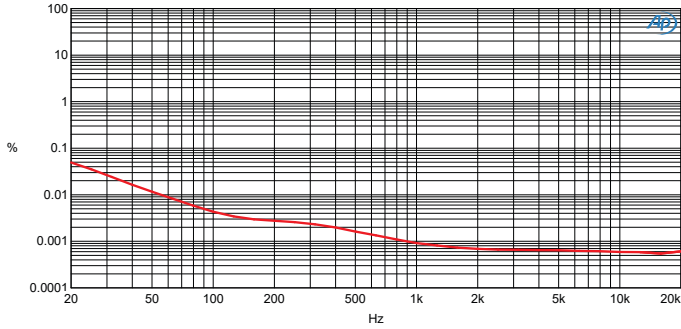


Stereo Direct Box Passive Noise Spectrum

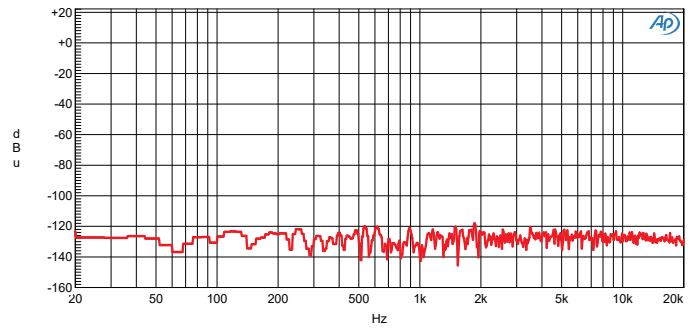

Stereo Direct Box Active Phase Shift

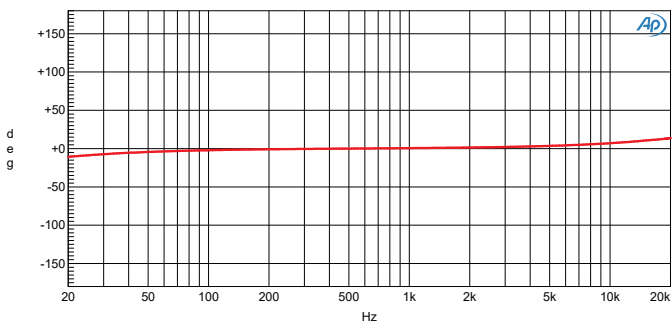

Stereo Direct Box Active Frequency Response

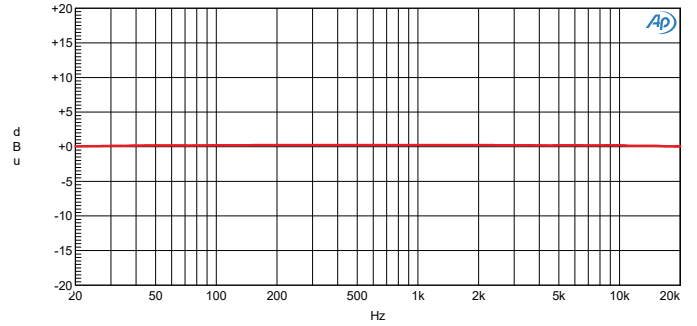

Stereo Direct Box Passive Fast Fourier Transform

