

VIVA-715D

ACTIVE 2-WAY SPEAKER

DESCRIPTIONS


VIVA-715D is a unique product in its category. The professional compression driver with custom designed dome and high power voice coil offers unique vocal clarity and constant sound coverage. The 15" woofer offers an extremely linear response and a precise low frequency control. The transducers are produced using the most advanced assembly technologies. The two channel amplifier delivers 1400 watts and is controlled by a DSP that takes care of crossover, equalization, phase control, soft limiting and transducers protection.

FEATURE

- 136 dB Max SPL
- 2 Channel Amplifier of 1,400 WATT
- Innovative DSP Processing
- 1" Compression Driver, 150" v.c.
- 15" Woofer, 3" v.c.
- 90°x60°, wide dispersion constant directivity horn
- 6 Preset
- FiR LINEAR PHASE Technology

APPLICATION

- Stand / Monitor / Flying / Vertical stack with VIVA-718D

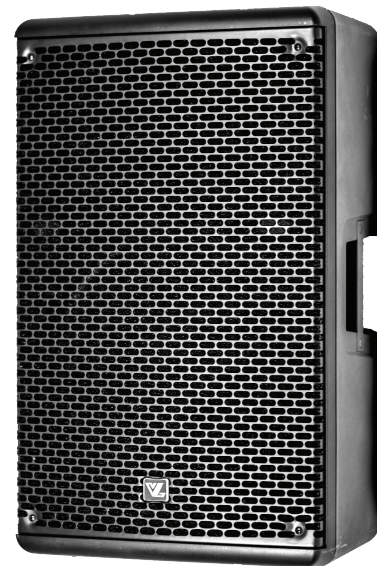

SPECIFICATIONS

Frequency Response	45 Hz - 20000Hz
Max SPL @ 1 m	136 dB
Horizontal coverage	90°
Vertical coverage angle	60°

TRANSDUCER

Compression Driver	1.0", 150"v.c
Woofer	15", 3"v.c

INPUT/OUTPUT SECTION

Input signal	Balance/Unbalance
Input connectors	XLR, TRS, TS
Output connectors	XLR
Input sensitivity	-2 dBu/+4dBu

PROCESSOR SECTION

Mic. Input Sensitivity	-32dBu
Crossover Frequencies	1,800Hz
Protections	Thermal, RMS
Limiter	Soft Limiter
Controls	Volume, Boost, Mic/Line

POWER SECTION


Total Power	1400W Peak, 700W RMS
High frequencies	200W Peak, 100W RMS
Low frequencies	1200W Peak, 600W RMS
Cooling	Convection
Connections	VDE

STANDARD COMPLIANCE

CE marking	Yes
------------	-----

PHYSICAL SPECIFICATIONS

Cabinet/Case Material	PP Composite
Hardware	2 x M10
Handles	1 Top, 2 Side
Pole mount/Cap	Yes
Grille	Steel
Color	Black

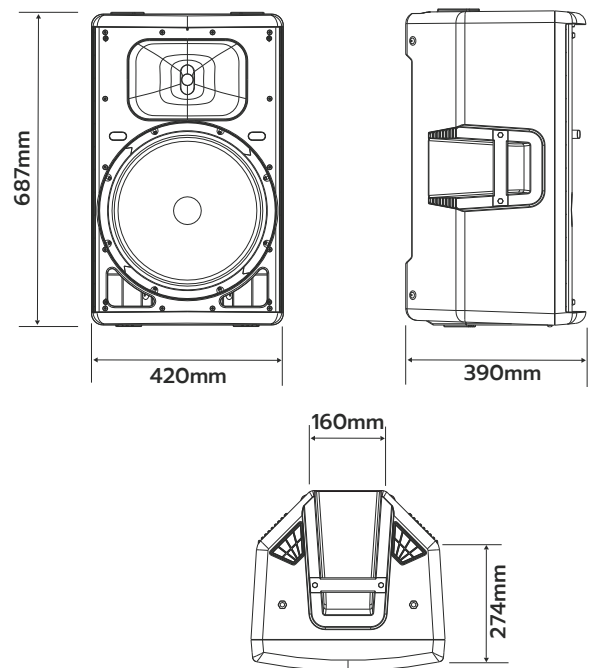

SIZE

Height	687mm
Width	420mm
Depth	390mm
Weight	20kg