

V-BOX MARK-II

STEREO PROMEDIA DIRECT BOX

DESCRIPTIONS

The V-Box Mark-II ProMedia is a passive stereo direct box designed for use with laptop computers and other consumer playback devices, eliminating hum and buzz from ground loops while providing an easy access level control for quick adjustments on stage.

FEATURE

- Stereo direct box for line level sources
- Handles huge transients without distortion
- Passive signal path with transformer isolation
- Eliminates hum and buzz when connecting to the PA

SPECIFICATIONS

Audio circuit type	Passive, Transformer based
Transformer	VL Transformer
Number of Channels	Stereo
Frequency response	20Hz-20kHz
Dynamic range	140dB
Total harmonic distortion	0.002% @1k, +4dBu
Phase deviation	-3.6° @20Hz, -1° @100Hz
Input impedance	10kΩ Balanced
Output impedance	270Ω Balanced
Maximum input	+20dBu 20-20kHz

FEATURES

Ground lift	Yes
Input connectors	4 TS 1/4"(2 Thru), 2 RCA, 1 TRS 3.5mm
Output connectors	2 XLR Male output

GENERAL




Conditions	For use in dry locations only
Warranty	Life time

SIZE

Height	48mm
Width	83mm
Depth	120mm
Weight	0.41kg

SHIPPING INFORMATIONS

Package height	54mm
Package width	98mm
Package depth	135mm
Package weight	0.49kg

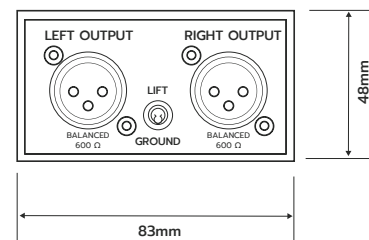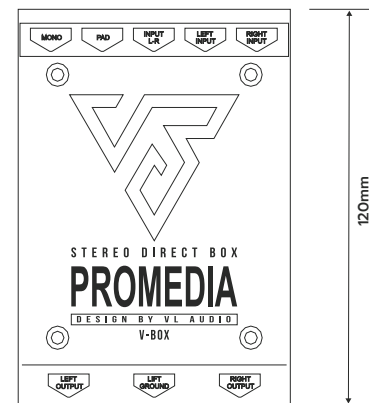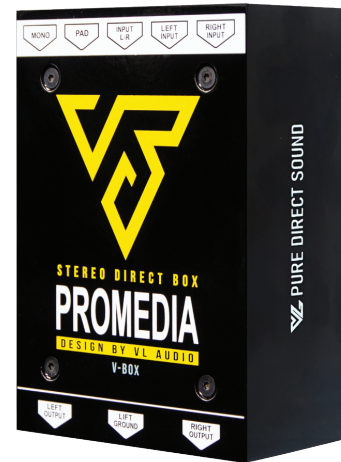

V-BOX MARK-II : STEREO PROMEDIA GRAPHS

